


More than 32 years of experience
C9 S designed to significantly reduce the lifting time of wires and very low height above ground-Low production per hectare (acre)

Main Advantages

- Designed not to create damage during contact with mechanical machinery (harvesting machine-pruner-soil cultivation)
- Cross section 35 x 30 mm - 26 mm (1.37 x 1.18 " - 1.02 ")
- Strong ability to install in difficult ground - Crimped edge on the bottom of the stake
- Special shape of the hooks to avoid closure during mechanical works
- Double hook for the wires during the soil cultivation

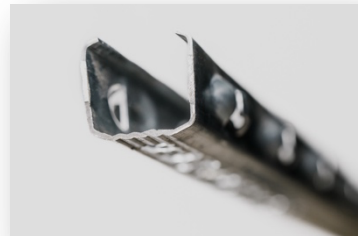


Galvanization

C9 S	Strip Galva Z 275 gr/m2 18-25µ per side En 10 142 Steel DX51-S250 GD			Cor-ten B type Steel S300JOWP			Hot dip galvanization En 1461 60-80µ per side Steel S235 JR En 10 025/En 10 147		
C9 S per bundles 100 pces / Coil 95	Thickness 1.50 0.059"	Thickness 1.80 0.0709"	Thickness 2.00 0.078"	Thickness 1.60 0.063"	Thickness 1.80 0.0709"	Thickness 2.00 0.078"	Thickness 1.65 0.064"	Thickness 1.95 0.076"	Thickness 2.15 0.084"
Weighting per mtr	1,12	1,34	-	-	1,34	-	1,23	1,47	-

Type of hooks

- Type A**
Hooks designed to significantly reduce the arduousness of the work and its cost
Adapted to current and future mechanical works (such a mechanical lifting)
- Type H**
Double hook for the wires during the soil cultivation



Installation advice

- Cap and mini piston on request
- Plant the post during the wet season
- Drive 25-30 % of the post length into the ground
- Deep rip soils during site preparation
- Drill a pilot hole in difficult ground
- Adaptation of the inter-distance between the posts in particular (windy area-high degree of mechanization)



Consortium France

Jean-Luc Duboeuf
4381 Route Du Tremblay
F-73 290 La Motte Servolex
Tel : +33 615 93 14 99
jl.duboeuf@consortium73.fr

Consortium S.p.A

Viale Dell'Industria, 26
I - 37038 Soave Verona Italia
Tel : +39 045 610 28 88
info@consortiumspa.net